


10/100BASE-TX QUAD PORT TRANSFORMER MODULES




For Auto Cross Over

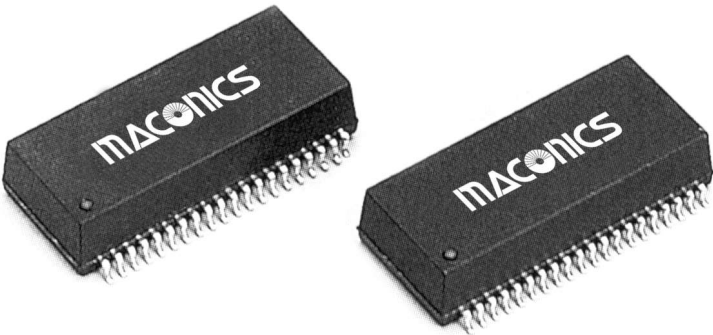

Electrical Specifications @ 25°C — Operating Temperature 0°C to 70°C

Part Number	Insertion Loss (dB TYP)	Return Loss (dB TYP)					Crosstalk (dB MIN)				Differential to Common Mode Rejection (dB MIN)		Hi-Pot (VRMS MIN)
	0.1-100 MHz	2-30 MHz	40 MHz	50 MHz	60-80 MHz		1 MHz	30 MHz	60 MHz	100 MHz	1-60 MHz	60-200 MHz	
HS2275	-1.0	-18	-14.4	-13.1	-12		-55	-45	-40	-33	-37	-25	1500

Mechanical

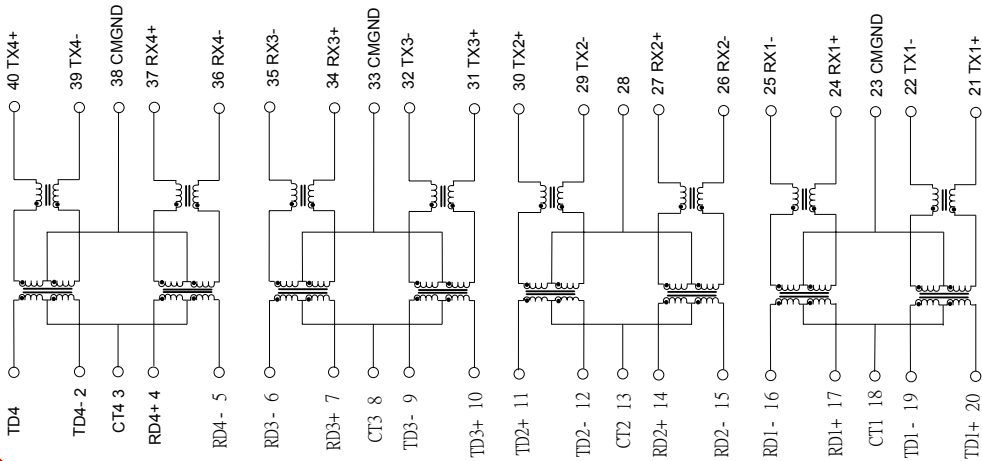

Schematics

HS2275

