


SURFACE MOUNT 10BASE-T INTERFACE MODULES

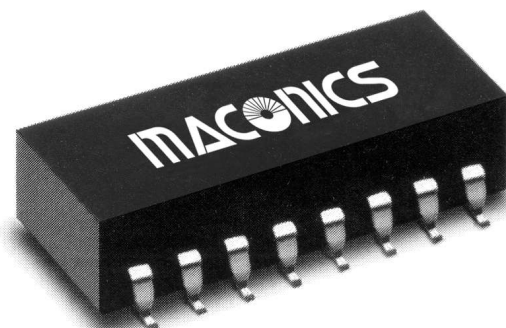

Electrical Specifications @ 25°C — Operating Temperature 0°C to +70°C

Part Number	Insertion Loss to 10 MHz (dB MAX)	Attenuation (XMIT) (dB MIN)			Return Loss 5 to 10MHz (dB MIN)		Crosstalk (dB MIN)	Common Mode Rejection (XMIT) (db MIN)					Hi-Pot (VRMS MIN)
		30 MHz	40 MHz	100 MHz	100 w	98 *3 w		5 MHz	10 MHz	50 MHz	100 MHz	200MHz	
MR-79136	-6.0	-35	-35	-35	-18	-15	-35	-60	-60	-55	-50	-45	1500
MR-79137	-1.0	-30	-35	-35	-18	-15	-35	-60	-60	-55	-50	-45	1500
MR-79138	-6.5	-35	-35	-35	-18	-15	-35	-60	-60	-55	-50	-45	1500
MR-79167	-1.0	-30	-27	-27	-18	-15	-30	-40	-30	-50	-45	-	1500
ET3112	-5.5	-30	-30	-35	-18	15	-30	-35	-30	-55	-50	-	1500
ET3114	-6.0	-30	-27	-27	-18	-15	-35	-40	-35	-45	-30	-	1500
ET3115	-5.0	-30	-35	-40	-18	-15	-25	-35	-30	-55	-50	-	1500
ET3118	-5.0	-30	-35	-40	-18	-15	-25	-35	-30	-55	-50	-	1500
ET3110	-1.0	-30	-27	-27	-18	-15	-35	-40	-35	-45	-45	-	1500

Mechanical

MR-791XX, ET311X

