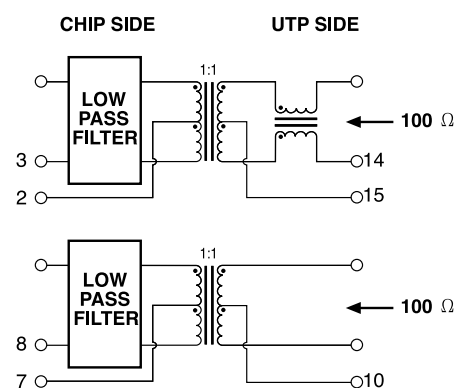


Part Number	Package Type (Pins)	Insertion Loss 1 to 10 MHz (dB MAX)	Attenuation (dB MIN)				Return Loss 1 to 10 MHz 100 W ± 15 W (dB MIN)	Crosstalk 1 to 30 MHz (dB MIN)	Common Mode Rejection (db MIN)	
			30-50 MHz		50-100 MHz				50 MHz	100 MHz
			TX	RX	TX	RX				
89A145C	DIL (16)	-1.0	-30	-15	-35	-20	-15	-30	-35	-30
89A2231B-01	DIL (16)	-1.0	-32	-20	-25	-25	-15	-30	-30	-25
89A2233B-01	DIL (16)	-1.0	-30	-15	-35	-20	-15	-30	-35	-30
ET 3121	DIL (16)	-6.0	-27	-15	-27	-15	-15	-30	-45	-30
MR-79123AS	SIL (16)	-5.5	-30	-20	-30	-20	-15	-30	-55	-45
MR-79128S	SIL (10)	-1.0	-25	-10	-27	-30	-15	-30	-55	-45

Schematics


[illegible]

10 BASE-T THROUGH HOLE INTERFACE MODULES


For 802.3 10Base-T LAN Applications

Mechanical



89A2231B-01, 89A2233B-01

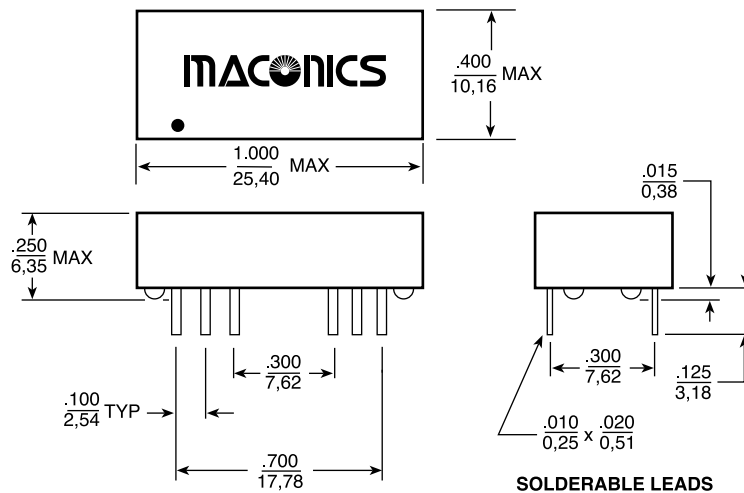

Schematics

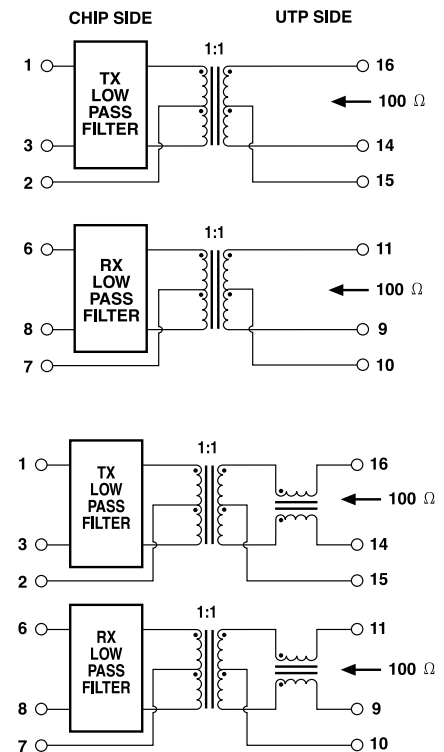



MR-79128S

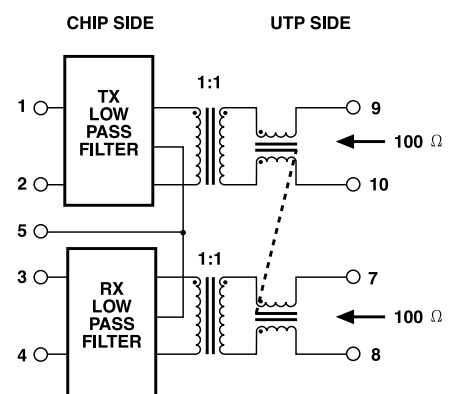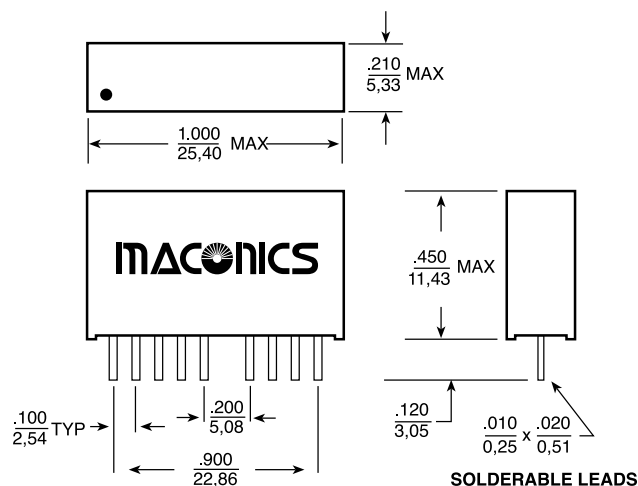

10 BASE-T THROUGH HOLE INTERFACE MODULES

Mechanical

ET3121

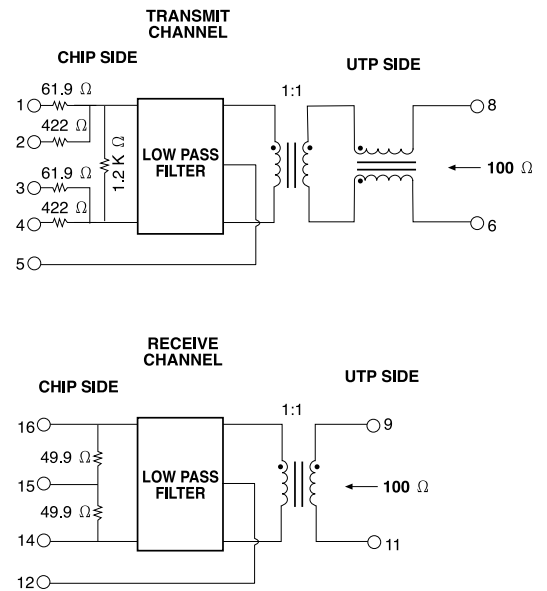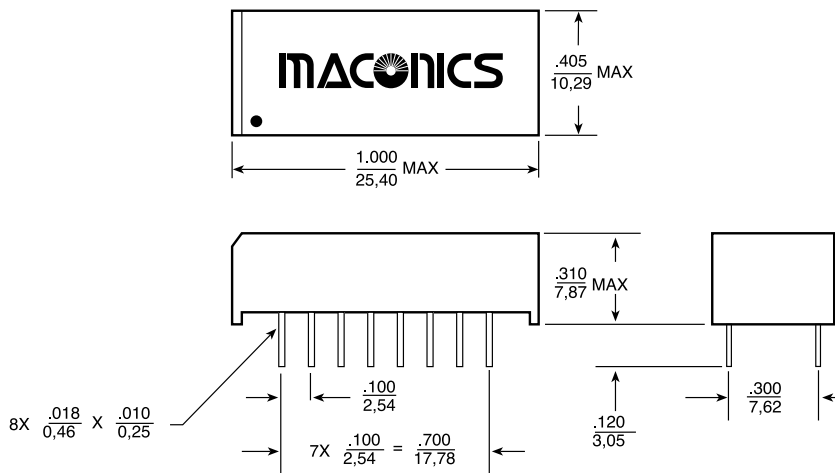

MR-79123AS

