


Reinforced Insulation, 3 KVrms, SMT




Electrical Specifications @ 25°C — Operating Temperature 0°C to 70°C

Part Number	Turns Ratio ^{A,B} (Pri:Sec ±2%)	OCL @ 25°C (mH MIN)	C _{WW} (pF MAX)	DCR Pri (Ω MAX)	DCR Sec (Ω MAX)	Package/ Schematic	Primary Pins
TM2141	1CT:1CT & 1CT:1CT	1.20 & 1.20	15 & 15	1.00 & 1.00	1.00 & 1.00	A / 1	1-3, 6-8
TM2142	1CT:1CT & 1CT:2CT	1.20 & 1.20	15 & 15	1.00 & 1.00	1.00 & 1.70	A / 1	1-3, 6-8
TM2192	1CT:1CT & 1CT:1.5CT	1.20 & 1.20	15 & 15	1.00 & 1.10	1.10 & 1.55	A / 1	1-3, 6-8
TM2143	1CT:1.15CT & 1CT:1CT	1.60 & 1.60	15 & 15	1.10 & 1.00	1.10 & 0.90	A / 1	16-14, 6-8
TM2144	1CT:1.15CT & 1CT:1.15CT	1.20 & 1.20	15 & 15	1.00 & 1.00	1.15 & 1.15	A / 1	1-3, 6-8
TM2145	1CT:1.15CT & 1CT:2CT	1.50 & 1.20	15 & 15	1.10 & 1.00	1.20 & 1.70	A / 1	16-14, 6-8
TM2146	1CS:1CS & 1CS:1.36CS	1.20 & 1.20	15 & 15	1.00 & 1.00	1.00 & 1.20	A / 2	1-4, 5-8
TM2149	1CT:1CT & 1CT:1.36CT	1.20 & 1.20	15 & 15	1.00 & 1.00	0.90 & 1.20	A / 1	1-3, 6-8
TM2147	1CT:1.36CT & 1CT:1.36CT	1.20 & 1.20	15 & 15	1.00 & 1.00	1.20 & 1.20	A / 1	1-3, 6-8
TM2148	1CT:1.41CT & 1CT:1.41CT	1.20 & 1.20	15 & 15	1.10 & 1.10	1.35 & 1.35	A / 1	16-14, 11-9
TM2191	1CT:1.41CT & 1CT:1.41CT	1.20 & 1.20	15 & 15	1.10 & 1.10	1.35 & 1.35	A / 1	1-3, 11-9
TM2140	1CT:2CT & 1CT:1.08CT	1.20 & 1.20	15 & 15	1.00 & 1.10	1.70 & 1.25	A / 1	16-14, 6-8
TM2154	1CT:2CT & 1CT:1.14CT	1.20 & 1.20	15 & 15	1.00 & 1.25	1.70 & 1.35	A / 1	16-14, 6-8
TM2155	1CT:2CT & 1CT:1.36CT	1.20 & 1.20	15 & 15	1.00 & 1.00	1.65 & 1.15	A / 1	16-14, 6-8
TM2156	1CT:2CT & 1CT:2CT	1.20 & 1.20	15 & 15	1.00 & 1.00	1.70 & 1.70	A / 1	16-14, 6-8
TM2158	1CT:2.3CT & 1CT:2CT	1.20 & 1.20	15 & 15	1.00 & 1.10	2.00 & 1.80	A / 1	16-14, 6-8
TM2150	1CT:1/1.26 & 1CT:2CT	1.50 & 1.20	15 & 15	1.00 & 1.00	1.30 & 1.65	A / 1	16-14, 6-8

Mechanical

A

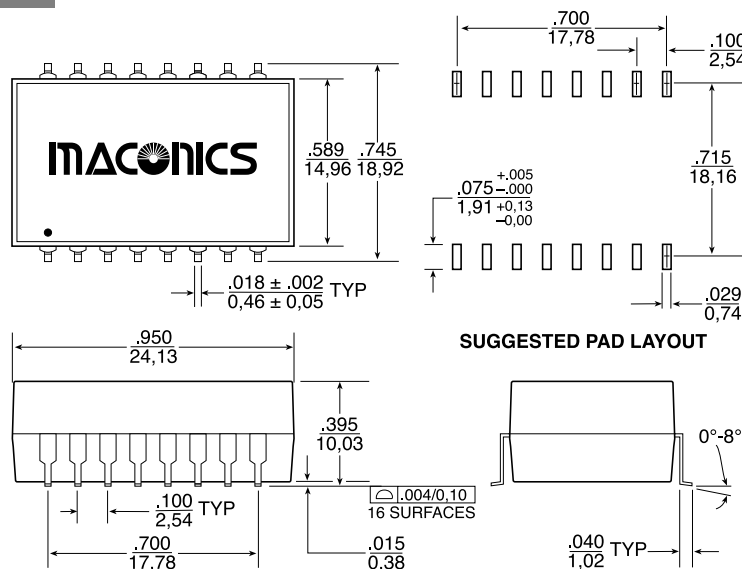

Schematic

